

Through Hole Choke


- ※ Through Hole Choke designed for ISDN
- ※ Operating temperature range: -40°C to + 125 °C
- ※ RoHS Compliance Product
- ※ 500VAC Isolation




Electrical Specifications @ 25°C

Part Number	Turns Ratio	OCL	Lk	DCR	DCR	DCR	Hi-Pot	
		@10KHZ 0.04V	@10KHZ,2V	@ 20°C	@ 20°C	@ 20°C	VAC	
	(1-10):(2-9):(4-7):(5-6)	(1-10)	(1-10) with (2+9,4+7,5+6 shorted)	(1-10) =(2-9)	(1-10)=(4-7)	(1-10) =(5-6)	1-2	
THC13583	1:1:1:1 ±1%	58 mH +50%/-30%	1.5 uH Max	1.3Ω MAX	1.3 Ω MAX	1.3Ω MAX	500VAC,2S	

Mechanical

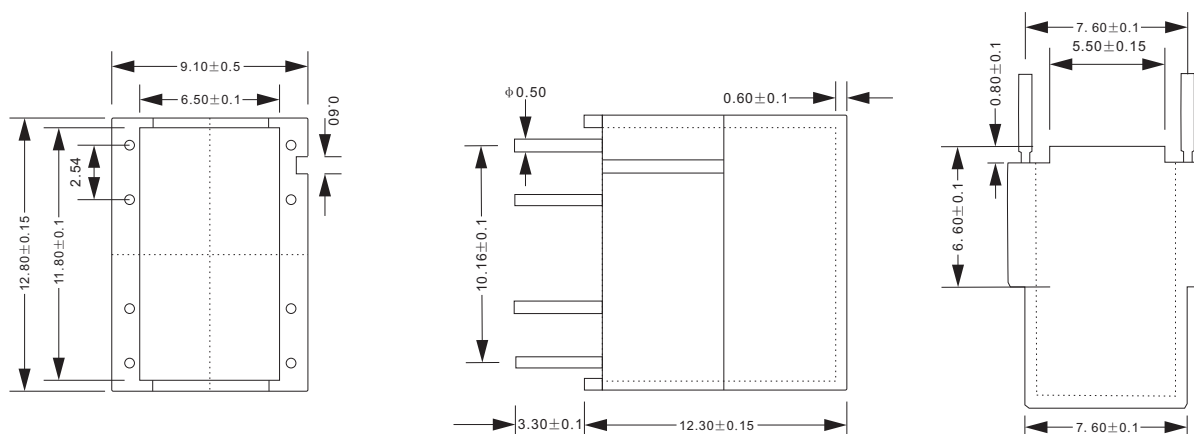

Schematics

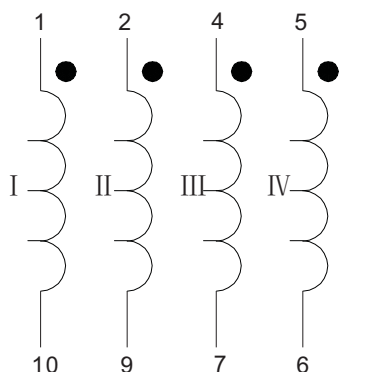

NOTE:

1. Dimensions: mm
2. Unless otherwise specified , tolerances : xx.x ± 0.25 (mm)